

Rymar

EXOTIC FOREST

Technical Data

Rymar Exotic Forest Wood Sealer is a special blend of tung oil, supreme linseed oil and other proprietary resins that help penetrate the surface of exotic hardwood and softwoods. With these special oils and advanced sunscreens, Rymar Exotic Forest Wood Sealer will stand the test of time.

Product Data:

Restrictions: Apply when air and surface temperature are above 65°F and below 90°F.

Weight per gallon: 8.38

Solids by weight: 55

VOC: Less than 200 G/L

Paintable: No

Flashpoint: 105°F

Type: Natural, Semi-transparent

Vehicle: Solvent

Finish: Flat

Colors: 4 5010 Natural Translucent, 5020 Canary Wood, 5030 Mahogany, 5040 Teak

Containers: 1 gallon, 5 gallons

Coverage: Approximately 300-400 square feet per gallon, depending on porosity of wood.

Drying Time: Approximately 1 to 7 days depending on temperature, 30 days to full cure. All times are temperature and moisture dependent.

Clean Up: Mineral Spirits

Application: Bristle Brush, sprayer (back brushing necessary) Tip Size— .011-.013

Reduction: None

Cure: Air Dry

Substrate: Wood

Shelf Life: Approximately 2 years. Product may darken with age.

Recommended Uses:

Decks—Siding—Log Homes—Fences—Formulated for hardwoods such as Teak, Ipe, and Mahogany. May also be used on softwoods.

Features & Benefits



- **Military Spec Additive**—Is a proprietary additive used by the military to enhance the longevity of coatings for specific applications.



- **Nano Particle Technology** -We incorporate nano particle technology (a shield of super-fine particles) to protect wood against abrasion, UV light, and moisture.



- **SunSeal Sunscreen**— We incorporate special UV absorbers and pigments to help block out any UV light from reaching the wood surface.



- **Citronella Oil**— A naturally occurring organic substance obtained from leaves of Asiatic lemon oil grass. Commonly used as a natural mosquito repellent.



- **Chew Stop**- Is a natural pepper additive that may help prevent animals from chewing on wood. It may also discourage bees, bugs, spiders, and birds—naturally.




- **Natural and Synthetic Oils**- A blend of Supreme linseed oil and synthetic oils allows for good penetration of the wood and still gives a surface build for greater protection of the substrate.



- **PTFE**— PTFE is used to both repel water and help protect against weather erosion.



- **Water Repellent**— Other so called water repellent wood sealers can't match the water beading qualities of our sealer. Along with the oils and PTFE you get superior water protection.

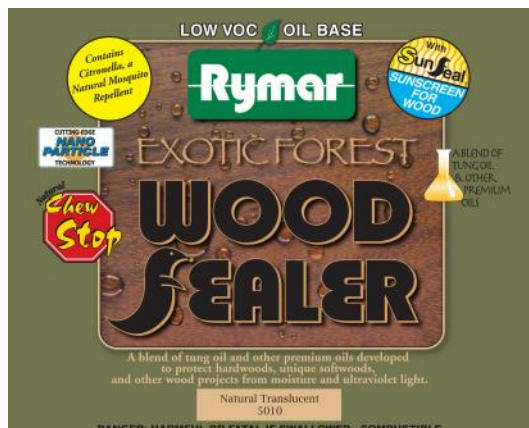

Rymar

EXOTIC FOREST

Technical Data

Directions: Wood should be clean and dry. It is recommended that Rymar Rinseable Soap be used to clean the wood before sealing. If using bleach do not allow it to remain on the surface for more than five minutes. Between coats, clean with Rymar Rinseable Soap and water, no bleach. **Do Not Use Metal Pails or Hard Water.** Ask your dealer about preparing surfaces for coatings; they may be able to advise you otherwise depending on your situation. A coat should be applied as soon as project is completed providing the wood is at a moisture content of 15% or less. If it is higher than 15% wait approximately three to six weeks before application. A second coat may be applied in 60 days after the first coat or when ever necessary. **MAINTENANCE COATS SHOULD BE DONE AS NEEDED.** Do not allow sealer to puddle. End grain on all wood should be sealed. Coating may be applied with a bristle brush or by spraying and then back brushing. Be sure to shake well before using and stir thoroughly during use. **IF USING MULTIPLE BATCH NUMBER, MIX THEM TOGETHER BEFORE APPLYING. Clear will not prevent graying!**

Maintenance: For continued performance a coat of Rymar Exotic Forest Wood Coating should be applied every 18 to 24 months. In some cases Rymar Exotic Forest Wood Coating may need to be applied more often depending on weather conditions, substrate conditions, project preparation and application.

Warranty: Rymar warrants that the contents of this can are not defective. In the event this product fails to comply with the warranty, it is Rymar LLC's option to furnish replacement of the product or a refund of the purchase price with proof of purchase. In the event of product failure and/or misuse of this product, Rymar and its affiliates assume no responsibility (implied or otherwise), for labor, substrate, other items or materials used in either the application of this product or otherwise.

FYI: Proper respirator, gloves, goggles, and clothing should be used during application, be sure to check with your dealer. Check each can for color uniformity. A brushout is recommended before doing a project.

***NOTE! Do a test:** Try a brushout on your project to ensure the color and product is what you want before doing your entire project. **Clear will not prevent graying as well as pigmented colors.**



6620 N CTH J - CATO - WI - 54230

www.rymarindustries.com

Email: rymar@rymarindustries.com

Call: 920-732-3909