



**RYMAR CHAMELEON WOOD COATING** is an oil modified water base acrylic urethane designed to completely disappear, leaving the wood looking as though there is nothing on it when it dries. It has no color, leaving it crystal clear; yet it protects against moisture, ultra violet light, dirt and stains. One coat continues to protect for years. Chameleon is formulated for interior use on logs, timbers, doors, windows, around indoor hot tubs and pools. Chameleon gives you outdoor protection for your indoor project, naturally.

### Product Data:

Restrictions: Apply when air and surface temperature are above 60° F and below 85°F.

Weight Per Gallon: 8.57 pounds

Solids by Weight: 30.13

VOC: Under 200 G/L

Paintable: No

Flashpoint: N/A

Type: Clear

Vehicle: Water

Finish: Flat

Containers: 1 Gallon, 5 Gallon

Coverage: Approximately 400-450 square feet per gallon

Dry Time: Approximately 1/2 hour to touch, 24 hours to use, 30 days to full cure. All times are temperature and moisture dependent.

Clean-Up: Warm soap and water

Application: Nylon brush, foam pad applicator, sprayer (back brushing necessary) Tip Size .011-.013

Reduction: None

Cure: Air Dry

Substrate: Wood

Shelf Life: Approximately 2 years. Product may darken with age.

### Recommended Uses:

Tongue and Groove—Pool Rooms—Interior Wood—Many Other Wood Projects

### Features & Benefits



- **Military Spec Additive**—Is a proprietary additive used by the military to enhance the longevity of coatings for specific applications.



- **Nano Particle Technology**—We incorporate nano particle technology (a shield of super-fine particles) to protect wood against abrasion, UV light, and moisture.



- **Sunseal Sunscreen**— We incorporate special UV absorbers and pigments to help block out any UV light from reaching the wood surface.



- **Citronella Oil**— A naturally occurring organic substance obtained from leaves of Asiatic lemon oil grass. Commonly used as a natural mosquito repellent.



- **Chew Stop**- Is a natural pepper additive that may help prevent animals from chewing on wood. It may also discourage bees, bugs, spiders, and birds—naturally.



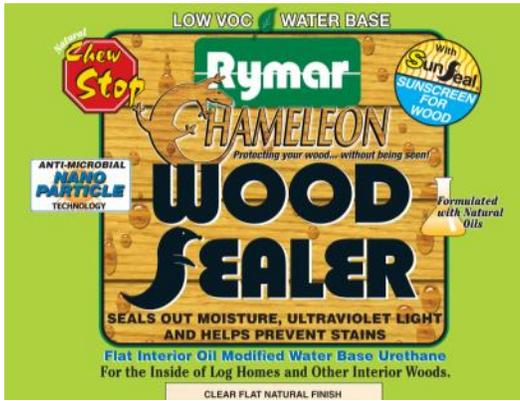
- **Natural and Synthetic Oils**- A blend of Supreme linseed oil and synthetic oils allows for good penetration of the wood and still gives a surface build for greater protection of the substrate.



- **PTFE**— PTFE is used to both repel water and help protect against weather erosion.



- **Water Repellent**— Other so called water repellent wood sealers can't match the water beading qualities of our sealer. Along with the oils and PTFE you get superior water protection.

## Technical Data

**DIRECTIONS:** Before doing your project, do a brush out to insure your satisfaction with the overall results. Wood should be clean and dry. Unseasoned wood should be allowed to dry to a moisture content of 12% to 15%. For better penetration and longer lasting protection, mill glaze should be removed using Rymar Rinseable Soap. **DO NOT USE METAL PAILS OR HARD WATER.** Ask your dealer about preparing surfaces for coatings; they may be able to advise you otherwise, depending on your situation. Clears will not stop graying as well as pigmented sealers. Chameleon is not recommended for exterior surfaces. Apply coating with a nylon brush or sprayer, do not shake before using; stir only. Brush with even strokes in one direction, if possible, with a high quality nylon brush. Apply 1 or 2 coats to your project for best results being careful to avoid runs, drips or over-spray. If more than one coat is applied, you can lightly sand the first coat for a smoother finish. Two or three coats work best, especially around windows and doors. Chameleon is not recommended for floors. One coat of Chameleon will dry to a flat finish in about 1/2 hour. With each additional coat, you may get a slight bit of shine. Chameleon can be applied over a wiping stain if a color is desired, however, the stain may affect the no finish look. Again, try a brushout before doing your entire project. Reapplication can be done in about 1/2 hour or when dry to the touch.

**Warranty:** Rymar warrants that the contents of this can are not defective. In the event this product fails to comply with the warranty, it is Rymar LLC's option to furnish replacement of product or a refund of the purchase price with proof of purchase. In the event of product failure and/or misuse of this product, Rymar and its affiliates assume no responsibility (implied or otherwise), for labor, substrate, other items or materials used in either the application of this product or otherwise.

**\*NOTE!** Do a test: Try a brush out on your project to ensure the color and product is what you want before doing your entire project.



6620 N CTH J - CATO - WI - 54230

[www.rymarindustries.com](http://www.rymarindustries.com)

Email: [rymar@rymarindustries.com](mailto:rymar@rymarindustries.com)

Call: 920-732-3909