

DECK REFLECTIONS

Technical Data

Rymer Deck Reflections Wood Sealer is a high solids low VOC oil base satin finish for exterior decks. Deck Reflections offers the ultimate protection and durability with the ease of one product, two coat system.

Product Data:

Restrictions: Apply when air and surface temperature are above 45°F and below 90°F.

Weight per gallon: 8.9

Solids by weight: Approx. 45

VOC: Less than 200 G/L

Paintable: No

Flashpoint: 105°F

Type: Clear, Semi-transparent

Vehicle: Solvent

Finish: Satin

Colors: 6 –6000-Clear, 6100-Cider, 6200-Acorn, 6300-Rum, 6400-Wicker, 6500-Mocha

Containers: 1 gallon, 5 gallons

Coverage: Approximately 200-400 square feet per gallon, depending on porosity of wood.

Drying Time: Approximately 24 to 48 hours depending on temperature, 30 days to full cure. All times are temperature and moisture dependent.

Clean Up: Mineral Spirits

Application: Bristle Brush, sprayer (tip size.011-.013)

Reduction: None

Cure: Air Dry

Substrate: Wood

Shelf Life: Approximately 2 years. Product may darken with age.

Recommended Uses:

Formulated for cedar, redwood, pressure treated wood exposed to the weather. Suited for decks, railings, fences and other wood projects

Features & Benefits



- **Military Spec Additive** –Is a proprietary additive used by the military to enhance the longevity of coatings for specific applications.



- **Nano Particle Technology** -We incorporate nano particle technology (a shield of super-fine particles) to protect wood against abrasion, UV light, and moisture.



- **Sun Seal Sunscreen**– We incorporate special UV absorbers and pigments to help block out any UV light from reaching the wood surface.



- **Citronella Oil**– A naturally occurring organic substance obtained from leaves of Asiatic lemon oil grass. Commonly used as a natural mosquito repellent.



- **Chew Stop**- Is a natural pepper additive that may help prevent animals from chewing on wood. It may also discourage bees, bugs, spiders, and birds—naturally.




- **Natural and Synthetic Oils**- A blend of Supreme linseed oil and synthetic oils allows for good penetration of the wood and still gives a surface build for greater protection of the substrate.



- **PTFE**– PTFE is used to both repel water and help protect against weather erosion.



- **Water Repellent**– Other so called water repellent wood sealers can't match the water beading qualities of our sealer. Along with the oils and PTFE you get superior water protection.

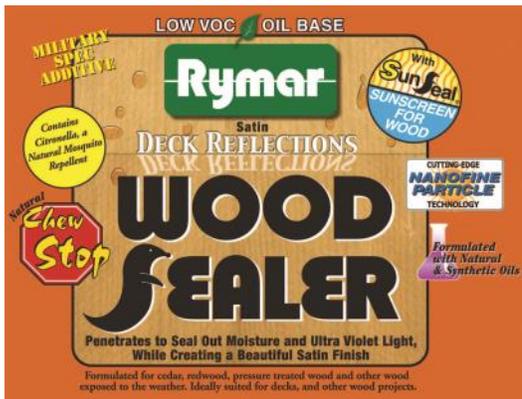

DECK REFLECTIONS

Technical Data

Directions: Wood should be clean and dry with a moisture content under 15%. It is recommended that Rymar Rinseable Soap be used to clean wood before sealing. If using bleach, do not allow it to remain on the wood longer than five minutes. Before applying a maintenance coat, clean substrate with Rymar Rinseable Soap and water, no bleach. **DO NOT USE METAL PAILS. DO NOT USE HARD WATER.** For superior adhesion we recommend sanding with 60-80 grit sandpaper to create a profile which will help the coating adhere. This is especially recommended on cedar decks. Ask your dealer about preparing surfaces for coatings; they may be able to advise you otherwise, depending on your situation. For new wood, a coat should be applied about 30 days after completion of the structural project, provided the wood is clean, dry (moisture content under 15%) and the mill glaze has been removed. Apply one coat and come back 24-48 hours later and apply the second coat. If the second coat is not applied in this period of time wait 30 days for the product to cure. **DO NOT ALLOW SEALER TO PUDDLE.** Some projects may require a third coat for sheen uniformity or repeat the procedure in six months to a year. In some cases you may need to reseal or maintain your project more often. Wood should be coated on all six sides for the best protection. **Clear will not prevent graying as well as the pigmented colors and will deteriorate at a quicker rate.** Sealer may be applied with a bristle brush or by spraying and back brushing. Be sure to shake well before using and stir thoroughly before and during use. **If you have multiple batch numbers, mix them together before applying.**

Maintenance: This is a film forming product and is susceptible to flaking if not properly maintained! A coat of Rymar Deck Reflections should be applied every 18 to 24 months or when deemed necessary. On hardwood applications a coat should be applied every 12 to 18 months. Rymar Deck Reflections may need to be applied more often depending on substrate conditions. Cedar decks will require annual maintenance.

Warranty: Rymar warrants that the contents of this can are not defective. In the event this product fails to comply with the warranty, it is Rymar LLC's option to furnish replacement of the product or a refund of the purchase price with proof of purchase. In the event of product failure and/or misuse of this product, Rymar and its affiliates assume no responsibility (implied or otherwise), for labor, substrate, other items or materials used in either the application of this product or otherwise.

FYI: Proper respirator, gloves, goggles, and clothing should be used during application, be sure to check with your dealer. Check each can for color uniformity. A brushout is recommended before doing a project. When applying on deck surfaces, do not allow sealer to puddle.

***NOTE! Do a test: Try a brushout on your project to ensure the color and product is what you want before doing your entire project.**



6620 N CTH J - CATO - WI - 54230

www.rymarindustries.com

Email: rymar@rymarindustries.com

Call: 920-732-3909